


FX205m

Made Shorter and Lighter for Unsurpassed Balance

FX205m air motor is approximately 25 percent shorter and 20 percent lighter than previous models. Its shorter, lighter air motor gives FX205m optimal balance, reducing stress and fatigue during treatments and enabling you to focus on the procedure at hand.



Reduced size and weight for unsurpassed balance

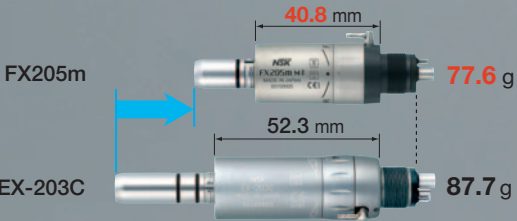

Easily Withstands Repeated Autoclaving and Thermo Disinfection

FX205m easily withstand repeated autoclaving at up to 135°C and thermo disinfection.



FX205m Air Motor • Stainless Steel Body • External Water Spray • Max. 25,000 min⁻¹



MODEL **FX205m M4** ORDER CODE **M1005001**
• Midwest 4 hole

MODEL **FX205m B2** ORDER CODE **M1006001**
• Borden 2 hole

FX205m Air Motor Set



MODEL **FX205m M4 Set** ORDER CODE **Y1002752**
• Midwest 4 hole

MODEL **FX205m B2 Set** ORDER CODE **Y1002753**
• Borden 2 hole

Contents
• Air Motor (FX205m) • Straight handpiece (FX65m)
• Contra-angle handpiece (FX25m)

Spare Parts

MODEL	PRODUCTS	ORDER CODE	MODEL	PRODUCTS	ORDER CODE	MODEL	PRODUCTS	ORDER CODE
FX25-04 Head cap for FX25m		C1052500	FX Spray nozzle For FX25m/FX15m		C1052702	Tube (RSM)		Z166101
FX25-03 Cartridge for FX25m		C1052700	FX Wrench For FX25m		C1052701			

Washable in the thermodisinfectant Autoclavable up to 135°C

NAKANISHI INC.
www.nsk-inc.com
700 Shimohinata Kanuma-shi Tochigi 322-8666, Japan
TEL : +81 (0)289-64-3380 FAX : +81 (0)289-62-5636

NSK Europe GmbH
www.nsk-europe.de
Elly-Beinhorn-Strasse 8 65760 Eschborn, Germany
TEL : +49 (0)6196 77606-0 FAX : +49 (0)6196 77606-29

NSK United Kingdom Ltd
www.nsk-uk.com
Office 5, Gateway1000, Arlington Business Park,
Whittle Way, Stevenage, SG1 2FP, UK
TEL : +44 (0)1438 310670 FAX : +44 (0)1438 310671

Specifications are subject to change without notice.

PR-D766E Ver.1 00.00.00.A



FX series



FX series

An integrated body Offering Peak Performance and Durability

With FX series, we introduced integrated contra-angles that reflected technologies developed throughout NSK history. The slim, stylish body gives you a larger operating field and offers a more secure grip. Stainless steel material ensures high durability and lighter weight, resulting in excellent all-around usability. FX series handpieces are also easy to clean due to their integrated construction. To support dental professionals handling a wide variety of applications, FX series lineup covers cutting, PMTC treatments, and endodontic procedures.



Solid Stainless Steel Body

Stainless steel is lighter and more durable than Brass Material. That reduces weight and well balanced shape give an unmatched tactile sense.



"Stress-free" form

All-round visibility: The super slim neck and body with ultra mini head supply expansive operation views and superior visibility of even hard-to-reach areas in the oral cavity. User-friendliness: You'll enjoy maximum accessibility during procedures thanks to the slim, perfect balance and ergonomic grip, cutting down on the stress associated with various treatments.

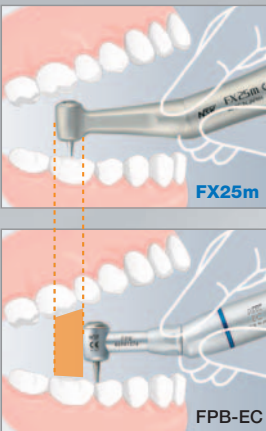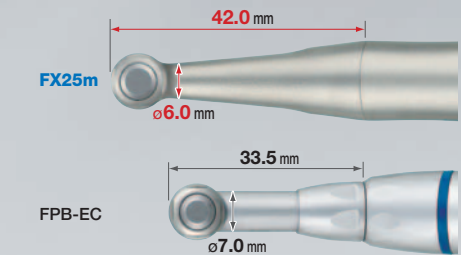

Maximum accessibility

Easy Cartridge Replacement

Cartridges are easily replaced with the accessory tools provided, helping you save on costs and reduce downtime (FX25m only).



Push Button Chuck

NSK original Push Button Chuck allows simple one-touch bur insertion and removal without tools.




Head Cap

Push button has been designed not to be pushed in mouth and to prevent bur loose while treatment.


Highly Durable against Autoclave and Thermo Disinfection

FX series handpieces easily withstand repeated autoclaving at up to 135°C and thermo disinfection.



High-Precision Gears

The high-precision gears run quiet and are supremely durable, which also reduces uncomfortable vibration.

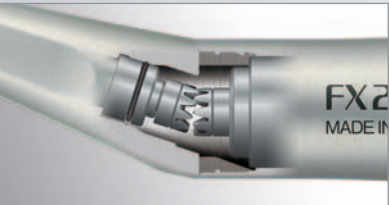


Hygienic

The seamless and stylish integrated body ensures easy and thorough cleaning after treatment, providing an elevated level of hygienic care.



Paste Defense System

FX57m's head incorporates NSK's original and exclusive dustproof mechanism known as the Paste Defense System. This system prevents polishing paste debris from entering the handpiece, and the DLC coating on the rotor prevents breakage caused by surface abrasions from the polishing paste. These features help to significantly extend the life of the handpiece. (FX57m only)

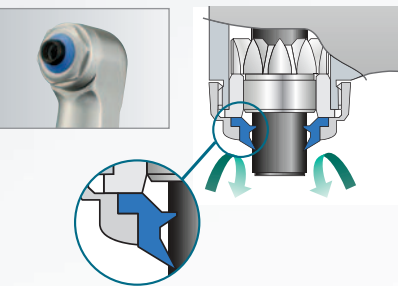

FX Contra-angles Lineup

General Applications Handpiece

1 : 1 Direct Drive



MODEL **FX25m** ORDER CODE **C1052001**

- For CA burs (ø2.35) • Push Button Chuck
- Ball Bearing • Max Speed: 40,000 min⁻¹

4 : 1 Reduction



MODEL **FX15m** ORDER CODE **C1053001**

- For CA burs (ø2.35) • Push Button Chuck
- Ball Bearing • Max Speed: 10,000 min⁻¹

Straight Handpiece

1 : 1 Direct Drive



MODEL **FX65m** ORDER CODE **H1014001**

- For HP burs (ø2.35) • Max Speed: 40,000 min⁻¹

Endodontic Handpiece

16 : 1 Reduction



MODEL **FX75m** ORDER CODE **C1055001**

- Miniature Head • For engine files
- 360° Rotation • Push Button Chuck
- Max Speed: 1,250 min⁻¹

Prophylaxis Handpiece

4 : 1 Reduction



MODEL **FX57m** ORDER CODE **C1054001**

- For screw-in cups and brushes • 360° Rotation
- Paste Defense System • w/o Spray
- Max Speed: 5,000 min⁻¹